

Hoses

INDUSTRIAL HOSES
GARDEN HOSES
SPECIAL HOSES AND TUBES
GAS AND WATER HOSES

 **MAT**[®]

Industrial hoses

4



Garden hoses

8




Special hoses and tubes

12



Gas and water hoses

14

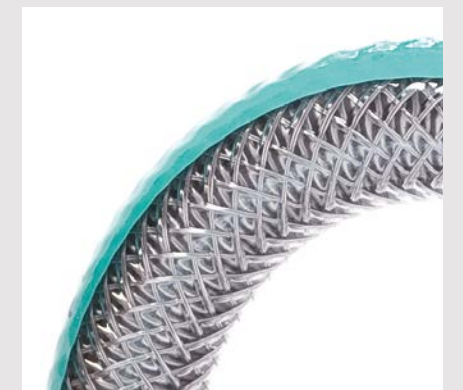

Industrial hoses

Maflex



USE
For standard use in agriculture and industry, for transporting water and air.

MATERIAL
Plasticized PVC.

DESIGN
Inner tubing black, casing bright yellow. Reinforced structure.

WORKING TEMPERATURE
Water +1° C to +50° C,
air -5° C to +50° C.

COMMENT
Goods not held in stock, made to order.

DIMENSIONS INNER/OUTER		ORDER NUMBER	LENGTH	OPERATION PRESSURE AT 20° C		DESTRUCTION PRESSURE AT 20° C
mm	"	code	m	bar	bar	bar
19/13	1/2	020803DK	25, 50	10	8	32

Mapres



USE
For heavy use in agriculture and industry, suitable as a cooling water and pressurised air connection to machinery.

MATERIAL
Plasticized PVC.

DESIGN
Inner tubing transparent, bluish transparent casing. Reinforced structure and winding fabric casing.

WORKING TEMPERATURE
Water +1° C to +50° C,
air -5° C to +50° C.

COMMENT
Goods not held in stock, made to order.

DIMENSIONS INNER/OUTER		ORDER NUMBER	LENGTH	OPERATION PRESSURE AT 20° C		DESTRUCTION PRESSURE AT 20° C
mm	"	code	m	bar	bar	bar
14,5/8	5/16	020701AH	50	20	15	60
16,5/10,5	3/8	020702AH	25	18	13,5	54
22/12,5	1/2	020703AH	25, 50	16	12	48

Matex

USE
For transporting gaseous, liquid or solid substances in all branches of industry. Resistant to climatic effects.

MATERIAL
Plasticized PVC.

DESIGN
Inner tubing & casing transparent blue. Braided fabric casing.

WORKING TEMPERATURE
-5° C to +60° C.

COMMENT
Goods not held in stock, made to order.



DIMENSIONS INNER/OUTER	ORDER NUMBER	LENGTH	OPERATION PRESSURE AT 20° C		DESTRUCTION PRESSURE AT 20° C
			WATER	AIR	
mm	code	m	bar	bar	bar
12/6	0225060120HD	25, 50	20	12,5	50
14/8	0225080140HD	25, 50	20	12,5	50
15/9	0225090150HD	25, 50	15	8,5	35
20/13	0225130200HD	25, 50	17	10	40
27/19	0225190270HD	25, 50	14	8	32

Mafresh

USE
Suitable for transporting fruit and vegetable juices, pressed juice, fruit nectar, lemonades, beer, syrup, ketchup, coffee, tea, wine and vinegar.

MATERIAL
Phtalate-free plasticized PVC.

DESIGN
Inner tubing and casing transparent. Winding fabric casing.

WORKING TEMPERATURE
+5° C to +50° C.

COMMENT
Goods not held in stock, made to order.



DIMENSIONS INNER/OUTER	ORDER NUMBER	LENGTH	OPERATION PRESSURE AT 20° C		DESTRUCTION PRESSURE AT 20° C
			WATER	AIR	
mm	code	m	bar	bar	bar
14,5/10	021502AA	50	10	7,5	30
17/12,5	021503AA	25, 50	10	7,5	30
22/16	021504AA	25, 50	10	7,5	30
26/19	021505AA	25, 50	9	6,5	27
33/25,5	021506AA	25	6	4,5	18

Mafuel

USE
As a result of its chemical stability this product is also intended for transporting various types of petrol, diesel and oil.

MATERIAL
Plasticized PVC.

DESIGN
Without reinforcement, transparent purple.

WORKING TEMPERATURE
-5° C to +50° C.

COMMENT
Goods not held in stock, made to order.

*please inquire about other coil lengths



DIMENSIONS INNER/OUTER	WALL THICKNESS	ORDER NUMBER	COIL LENGTH*
mm	mm	code	m
6/4	1	0404000600	25
7/4	1,5	0404000700	25
8/5	1,5	0405000800	25, 100
9/6	1,5	0406000900	25
10/6	2	0406001000	25
10/7	1,5	0407001000	25
11/8	1,5	0408001100	25
12/8	2	0408001200	25
13/10	1,5	0410001300	25
14/10	2	0410001400	25

Maklar

USE
For use during free-flow transport of water and air.

MATERIAL
Plasticized PVC.

DESIGN
Inner tubing and casing transparent light blue. Please inquire about other colours.

WORKING TEMPERATURE
Water +1° C to +50° C, air -5° C to +50° C.

COMMENT
Goods not held in stock, made to order.

*please inquire about other coil lengths



DIMENSIONS INNER/OUTER	WALL THICKNESS	ORDER NUMBER	COIL LENGTH*
mm	mm	code	m
6/3	1,5	0220030060	100
6/4	1,0	0220040060	100
7/4	1,5	0220040070	25
8/4	2,0	0220040080	100
8/5	1,5	0220060090	100
9/6	1,5	0220060090	100
10/6	2,0	0220060100	50
10/7	1,5	0220070100	100
12/8	2,0	0220080120	100
12/9	1,5	0220090120	50
16/12	2,0	0220120160	50
18/12	3,0	0220120180	50
19/15	2,0	0220150190	50
20/16	2,0	0220160200	40
22/16	3,0	0220160220	40
22/18	2,0	0220180220	50
24/19	2,5	0220190240	25
31/25	3,0	0220250310	25

Garden hoses

KIWI exklusiv

USE

For gardening and in households, in agriculture for transporting water and air.

MATERIAL

Plasticized PVC.

DESIGN

Inner tubing black, casing transparent green. Winding fabric casing.

WORKING TEMPERATURE

Water +1° C to +50° C,
air -5° C to +50° C.

ADVANTAGES

Higher resistance to algae formation. Resistant to deformation.



DIMENSIONS INNER/OUTER		ORDER NUMBER	LENGTH	OPERATION PRESSURE AT 20° C		DESTRUCTION PRESSURE AT 20° C
				WATER	AIR	
mm	"	code	m	bar	bar	bar
12,5/8	5/16	020101DC	50	15	11	45
14,5/10	3/8	020102DC	50	10	7,5	30
17/12,5	1/2	020103DC	10, 15, 20, 25, 50	12	8,5	35
22/16	5/8	020104DC	25, 50	10	7,5	30
24,5/19	3/4	020105DC	10, 15, 20, 25, 50	7	6	25
33/25,5	1	020106DC	10, 15, 25, 50	6	5	20

ROSA exklusiv

USE

For gardening and in households, in agriculture for transporting water and air.

MATERIAL

Plasticized PVC.

DESIGN

Inner tubing and casing transparent. Winding fabric casing.

WORKING TEMPERATURE

Water +1° C to +50° C,
air -5° C to +50° C.

ADVANTAGES

Resistant to deformation.



DIMENSIONS INNER/OUTER		ORDER NUMBER	LENGTH	OPERATION PRESSURE AT 20° C		DESTRUCTION PRESSURE AT 20° C
				WATER	AIR	
mm	"	code	m	bar	bar	bar
12,5/8	5/16	020101AA	50	15	11	45
14,5/10	3/8	020102AA	50	10	7,5	30
17/12,5	1/2	020103AA	25, 50	12	8,5	35
22/16	5/8	020104AA	25, 50	10	7,5	30
24,5/19	3/4	020105AA	25, 50	7	6	25
33/25,5	1	020106AA	25, 50	6	5	20

MAT exklusiv

USE
For gardening and in households, in agriculture for transporting water and air.

MATERIAL
Plasticized PVC.

DESIGN
Inner tubing transparent, casing transp. green. Winding fabric casing.

WORKING TEMPERATURE
Water +1°C to +50°C,
air -5°C to +50°C.

ADVANTAGES
Resistant to deformation.



DIMENSIONS INNER/OUTER		ORDER NUMBER	LENGTH	OPERATION PRESSURE AT 20° C		DESTRUCTION PRESSURE AT 20° C
mm	"			WATER	AIR	
		code	m	bar	bar	bar
12,5/8	5/16	020101AF	50	15	11	45
14,5/10	3/8	020102AF	50	10	7,5	30
17/12,5	1/2	020103AF	25, 50	12	8,5	35
22/16	5/8	020104AF	25, 50	10	7,5	30
24,5/19	3/4	020105AF	25, 50	7	6	25
33/25,5	1	020106AF	25, 50	6	5	20

KIWI light

USE
For standard use in gardening.

MATERIAL
Plasticized PVC.

DESIGN
Inner tubing black, casing transparent green. Winding fabric casing. Lightweight construction.



WORKING TEMPERATURE
Water +1°C to +50°C.

ADVANTAGES
Higher resistance to algae formation.

DIMENSIONS INNER/OUTER		ORDER NUMBER	LENGTH	OPERATION PRESSURE AT 20° C		DESTRUCTION PRESSURE AT 20° C
mm	"			WATER	AIR	
		code	m	bar	bar	bar
16,5/12,5	1/2	020203DC	25, 50	10	7,5	30
24/19	3/4	020205DC	25, 50	7	5	22
31/25	1	020206DC	25, 50	6	5	20
39/31	5/4	020207DC	25, 50	5	4	16

ROSA light

USE
For light use in gardening.

MATERIAL
Plasticized PVC.

DESIGN
Inner tubing and casing transparent. Winding fabric casing. Lightweight construction.

WORKING TEMPERATURE
Water +1°C to +50°C.



DIMENSIONS INNER/OUTER		ORDER NUMBER	LENGTH	OPERATION PRESSURE AT 20° C		DESTRUCTION PRESSURE AT 20° C
mm	"			WATER	AIR	
		code	m	bar	bar	bar
16,5/12,5	1/2	020203AA	25, 50	10	7,5	30
24/19	3/4	020205AA	25, 50	7	5	22
31/25	1	020206AA	25, 50	6	5	20
39/31	5/4	020207AA	25, 50	5	4	16

MAT light

USE
For light use in gardening.

MATERIAL
Plasticized PVC.

DESIGN
Inner tubing transparent, casing transparent green. Winding fabric casing. Lightweight construction.

WORKING TEMPERATURE
Water +1°C to +50°C.



DIMENSIONS INNER/OUTER		ORDER NUMBER	LENGTH	OPERATION PRESSURE AT 20° C		DESTRUCTION PRESSURE AT 20° C
mm	"			WATER	AIR	
		code	m	bar	bar	bar
16,5/12,5	1/2	020203AG	25, 50	10	7,5	30
24/19	3/4	020205AG	25, 50	7	5	22
31/25	1	020206AG	25, 50	6	5	20
39/31	5/4	020207AG	25, 50	5	4	16

Special hoses and tubes

Pipettes



USE
For veterinary use.

MATERIAL
PP, HDPE.

TYPE
Natural colour.

WORKING TEMPERATURE
+5° C to +40° C.

COMMENT
Goods are not normally in stock, made to order.

*please inquire about other cut lengths

MATERIAL	DIMENSIONS INNER/OUTER	ORDER NUMBER	CUT LENGTH*	PACKAGING
PP	mm	code	mm	
PP	6,4/4,0	04040006D0	500	1500 pcs/box
PP	3,5/2,3	0402C003E0	750	500 pcs/sleeve
HDPE	9,7/7,3	—	500	1500 pcs/box

Tubes of precise lengths



USE
For simple application in the health care industry, the food industry and other branches of industry.

MATERIAL
Phthalate-free plasticized PVC, conform with the Council Directive 93/42/EEC to produce sanitary devices.

TYPE
Single-layer transparent, matt or clear colour. Please inquire about other colours.

WORKING TEMPERATURE
-5° C to +50° C.

*please inquire about other cut lengths

COMMENT
Goods are not normally in stock, made to order.

DIMENSIONS INNER/OUTER	WALL THICKNESS	CUT LENGTH*
mm	mm	mm
3,7/0,5	1,6	from 20 mm accurate ± 1 %
4/0,8	1,6	from 20 mm accurate ± 1 %
6/4	1	from 20 mm accurate ± 1 %
7,3/4,3	1,5	from 20 mm accurate ± 1 %
9,1/6,1	1,5	from 20 mm accurate ± 1 %

Catheters



USE
For veterinary use.

MATERIAL
PVC.

TYPE
Natural colour.

WORKING TEMPERATURE
-5° C to +60° C.

COMMENT
Goods are not normally in stock, made to order.

*please inquire about other cut lengths

DIMENSIONS INNER/OUTER	ORDER NUMBER	CUT LENGTH*	PACKAGING
mm	code	mm	box
4,9/2,5	0402E004I0	500	2000 pcs
4,7/2,5	0402E004G0	500	2000 pcs

Gas and water hoses

FPGS 00B

Gas hoses Euro FPGS 2 for cookers installation

- quick and trouble-free installation of a cooker due to ending with rotatable joint
- arbitrary placement of a cooker after its installation to gas conduit due to elastic hose and flexible end-part
- safe connection with gas cooker confirmed by certificate in System 1
- maintenance of cleanness of gas cookers due to possibility of easy shift of equipment without worries about sealing of hoses



Gas coupler with metal elastic joint
 Nut of rotatable joint Rp 1/2" + valve.
 Minimum semi-diameter of multiplex flexion: R work 50 mm.
 MOP: 0,5 bar.

GAS FPGS 2 ACCORDING TO NORM EN 1480	ORDER NUMBER	PRODUCT NAME	LENGTH	CERTIFICATE IN SYSTEM 1	GUARANTEE
	code		m		
FPGS 2- 00B	FPGS 2 00B-050	Gas hose FPGS-00B with valve L=0,50	0,5	yes	10 years
FPGS 2- 00B	FPGS 2 00B-075	Gas hose FPGS-00B with valve L=0,75	0,75	yes	10 years
FPGS 2- 00B	FPGS 2 00B-100	Gas hose FPGS-00B with valve L=1,00	1	yes	10 years
FPGS 2- 00B	FPGS 2 00B-125	Gas hose FPGS-00B with valve L=1,25	1,25	yes	10 years
FPGS 2- 00B	FPGS 2 00B-150	Gas hose FPGS-00B with valve L=1,50	1,50	yes	10 years
FPGS 2- 00B	FPGS 2 00B-200	Gas hose FPGS-00B with valve L=2,00	2,00	yes	10 years

FPGS 04KB

Elastic gas hose
Gas connector and screw 90° Rp 1/2".
Nut of rotatable joint Rp 1/2".
Semi-diameter of flexion: limitless.
MOP: 0,5 bar.



GAS FPGS 2 ACCORDING TO NORM EN 1480	ORDER NUMBER	PRODUCT NAME	LENGTH	CERTIFICATE IN SYSTEM 1	GUARANTEE
	code		m		
FPGS 2- 04KB	FPGS 2 04KB-050	Elastic gas hose FPGS-04KB with knee-connector L=0,50	0,5	yes	10 years
FPGS 2- 04KB	FPGS 2 04KB-075	Elastic gas hose FPGS-04KB with knee-connector L=0,75	0,75	yes	10 years
FPGS 2- 04KB	FPGS 2 04KB-100	Elastic gas hose FPGS-04KB with knee-connector L=1,00	1	yes	10 years
FPGS 2- 04KB	FPGS 2 04KB-125	Elastic gas hose FPGS-04KB with knee-connector L=1,25	1,25	yes	10 years
FPGS 2- 04KB	FPGS 2 04KB-150	Elastic gas hose FPGS-04KB with knee-connector L=1,50	1,50	yes	10 years
FPGS 2- 04KB	FPGS 2 04KB-200	Elastic gas hose FPGS-04KB with knee-connector L=2,00	2,00	yes	10 years

FPGS 08B

Elastic gas hose
Rotatable nut G 1/2".
Nut of rotatable joint Rp 1/2".
Semi-diameter of flexion: limitless.
MOP: 0,5 bar.



GAS FPGS 2 ACCORDING TO NORM EN 1480	ORDER NUMBER	PRODUCT NAME	LENGTH	CERTIFICATE IN SYSTEM 1	GUARANTEE
	code		m		
FPGS 2- 08B	FPGS 2 08B-050	Elastic gas hose FPGS-08B L=0,50	0,5	yes	10 years
FPGS 2- 08B	FPGS 2 08B-075	Elastic gas hose FPGS-08B L=0,75	0,75	yes	10 years
FPGS 2- 08B	FPGS 2 08B-100	Elastic gas hose FPGS-08B L=1,00	1	yes	10 years
FPGS 2- 08B	FPGS 2 08B-125	Elastic gas hose FPGS-08B L=1,25	1,25	yes	10 years
FPGS 2- 08B	FPGS 2 08B-150	Elastic gas hose FPGS-08B L=1,50	1,50	yes	10 years
FPGS 2- 08B	FPGS 2 08B-200	Elastic gas hose FPGS-08B L=2,00	2,00	yes	10 years

FPGS 11AB

Elastic gas hose
Rotatable nut G 1/2".
Connector of rotatable joint Rp 1/2".
Semi-diameter of flexion: limitless.
MOP: 0,5 bar.



GAS FPGS 2 ACCORDING TO NORM EN 1480	ORDER NUMBER	PRODUCT NAME	LENGTH	CERTIFICATE IN SYSTEM 1	GUARANTEE
	code		m		
FPGS 2- 11AB	FPGS 2 11AB-050	Elastic gas hose FPGS-11AB with connector L=0,50	0,5	yes	10 years
FPGS 2- 11AB	FPGS 2 11AB-075	Elastic gas hose FPGS-11AB with connector L=0,75	0,75	yes	10 years
FPGS 2- 11AB	FPGS 2 11AB-100	Elastic gas hose FPGS-11AB with connector L=1,00	1	yes	10 years
FPGS 2- 11AB	FPGS 2 11AB-125	Elastic gas hose FPGS-11AB with connector L=1,25	1,25	yes	10 years
FPGS 2- 11AB	FPGS 2 11AB-150	Elastic gas hose FPGS-11AB with connector L=1,50	1,50	yes	10 years
FPGS 2- 11AB	FPGS 2 11AB-200	Elastic gas hose FPGS-11AB with connector L=2,00	2,00	yes	10 years

FPGS 04B

Elastic gas hose
Swivel nut Rp 1/2".
Nut of rotatable joint Rp 1/2".
Semi-diameter of flexion: limitless.
MOP: 0,5 bar.



GAS FPGS 2 ACCORDING TO NORM EN 1480	ORDER NUMBER	PRODUCT NAME	LENGTH	CERTIFICATE IN SYSTEM 1	GUARANTEE
	code		m		
FPGS 2- 04B	FPGS 2 04B-050	Elastic gas hose FPGS-04B and screw L=0,50	0,5	yes	10 years
FPGS 2- 04B	FPGS 2 04B-075	Elastic gas hose FPGS-04B and screw L=0,75	0,75	yes	10 years
FPGS 2- 04B	FPGS 2 04B-100	Elastic gas hose FPGS-04B and screw L=1,00	1	yes	10 years
FPGS 2- 04B	FPGS 2 04B-125	Elastic gas hose FPGS-04B and screw L=1,25	1,25	yes	10 years
FPGS 2- 04B	FPGS 2 04B-150	Elastic gas hose FPGS-04B and screw L=1,50	1,50	yes	10 years
FPGS 2- 04B	FPGS 2 04B-200	Elastic gas hose FPGS-04B and screw L=2,00	2,00	yes	10 years

PSR-ANT

Stretching hoses for installation of gas furnaces

- easy installation in difficult accessible places
- possibility of hose stretch
- arbitrary hose formation eliminates use of time demanding and uncomfortable knee-connectors and connectors
- now the stretching is easier
- print on protector with information about the length
- visible print informs if the hose has not been already stretched
- up to 3 diametres and 2 types of end-parts



Gas hose from steel crinkle pipes for stretch Ø DN 15, DN 20, DN 25.
Rotatable nut G1/2", G3/4", G1".
Hexagonal connector R1/2", R3/4", R1".
MOP: 0,5 bar.

GAS HOSE	ORDER NUMBER	PRODUCT NAME	LENGTH	GUARANTEE
	code		m	
PSR	PSR 08 ANT-010	Gas hose DN 12 L=100/180 ANT with connector	0,1-0,18	2 years
PSR	PSR 08 ANT-015	Gas hose DN 12 L=150/280 ANT with connector	0,15-0,28	2 years
PSR	PSR 08 ANT-025	Gas hose DN 12 L=250-450 ANT with connector	0,25-0,45	2 years
PSR	PSR 08 ANT-035	Gas hose DN 12 L=350-500 ANT with connector	0,35-0,5	2 years
PSR	PSR 06 ANT-010	Gas hose DN 20 L=100/180 ANT with connector	0,1-0,18	2 years
PSR	PSR 06 ANT-015	Gas hose DN 20 L=150/280 ANT with connector	0,15-0,28	2 years
PSR	PSR 06 ANT-025	Gas hose DN 20 L=250-450 ANT with connector	0,25-0,45	2 years
PSR	PSR 06 ANT-035	Gas hose DN 20 L=350-600 ANT with connector	0,35-0,6	2 years
PSR	PSR 06 ANT-050	Gas hose DN 20 L=500-700 ANT with connector	0,5-0,7	2 years
PSR	PSR 07 ANT-010	Gas hose DN 25 L=100/180 ANT with connector	0,1-0,18	2 years
PSR	PSR 07 ANT-015	Gas hose DN 25 L=150/280 ANT with connector	0,15-0,28	2 years
PSR	PSR 07 ANT-025	Gas hose DN 25 L=250-450 ANT with connector	0,25-0,45	2 years
PSR	PSR 07 ANT-035	Gas hose DN 25 L=350-600 ANT with connector	0,35-0,6	2 years
PSR	PSR 07 ANT-050	Gas hose DN 25 L=500-800 ANT with connector	0,5-0,8	2 years

PSR-AT



Gas hose from steel crinkle pipes for stretch Ø DN 15, DN 20, DN 25.
Rotatable nut G1/2", G3/4", G1".
MOP: 0,5 bar.

GAS HOSE	ORDER NUMBER	PRODUCT NAME	LENGTH	GUARANTEE
	code		m	
PSR	PSR 08 AT-010	Gas hose DN 12 L=100/180 AT 2 rotatable nuts	0,1-0,18	2 years
PSR	PSR 08 AT-015	Gas hose DN 12 L=150/280 AT 2 rotatable nuts	0,15-0,28	2 years
PSR	PSR 08 AT-025	Gas hose DN 12 L=250-450 AT 2 rotatable nuts	0,25-0,45	2 years
PSR	PSR 08 AT-035	Gas hose DN 12 L=350-500 AT 2 rotatable nuts	0,35-0,5	2 years
PSR	PSR 06 AT-010	Gas hose DN 20 L=100/180 AT 2 rotatable nuts	0,1-0,18	2 years
PSR	PSR 06 AT-015	Gas hose DN 20 L=150/280 AT 2 rotatable nuts	0,15-0,28	2 years
PSR	PSR 06 AT-025	Gas hose DN 20 L=250-450 AT 2 rotatable nuts	0,25-0,45	2 years
PSR	PSR 06 AT-035	Gas hose DN 20 L=350-600 AT 2 rotatable nuts	0,35-0,6	2 years
PSR	PSR 06 AT-050	Gas hose DN 20 L=500-700 AT 2 rotatable nuts	0,5-0,7	2 years
PSR	PSR 07 AT-010	Gas hose DN 25 L=100/180 AT 2 rotatable nuts	0,1-0,18	2 years
PSR	PSR 07 AT-015	Gas hose DN 25 L=150/280 AT 2 rotatable nuts	0,15-0,28	2 years
PSR	PSR 07 AT-025	Gas hose DN 25 L=250-450 AT 2 rotatable nuts	0,25-0,45	2 years
PSR	PSR 07 AT-035	Gas hose DN 25 L=350-600 AT 2 rotatable nuts	0,35-0,6	2 years

FPWR-A

Water hose for installation of heaters and water batteries

- possibility of hose stretch to double length
- easy installation
- comfort with hose formation without a necessity to use time demanding and uncomfortable knee-connectors and connectors
- up to 5 lengths on offer
- choice of 3 diametres
- hygienic attest – the product is intended for drinking water



Stretching water hose
Rotatable nut G1/2", G3/4", G1".
MOP: 0,5 bar.

STRETCHING WATER HOSE	ORDER NUMBER	PRODUCT NAME	LENGTH	APPROVED	HYGIENIC ATTEST	GUARANTEE
	code		m			
FPWR	FPWR-08A-0010	Stretching water hose DN12 L=100-200 A 2 rotatable nuts	0,1-0,2	yes	yes	2 years
FPWR	FPWR-08A-0015	Stretching water hose DN12 L=150-300 A 2 rotatable nuts	0,15-0,3	yes	yes	2 years
FPWR	FPWR-08A-0025	Stretching water hose DN12 L=250-500 A 2 rotatable nuts	0,25-0,5	yes	yes	2 years
FPWR	FPWR-08A-0035	Stretching water hose DN12 L=350-700 A 2 rotatable nuts	0,35-0,7	yes	yes	2 years
FPWR	FPWR-08A-0050	Stretching water hose DN12 L=500-1000 A 2 rotatable nuts	0,5-1	yes	yes	2 years
FPWR	FPWR-06A-0010	Stretching water hose DN20 L=100-200 A 2 rotatable nuts	0,1-0,2	yes	yes	2 years
FPWR	FPWR-06A-0015	Stretching water hose DN20 L=150-300 A 2 rotatable nuts	0,15-0,3	yes	yes	2 years
FPWR	FPWR-06A-0025	Stretching water hose DN20 L=250-500 A 2 rotatable nuts	0,25-0,5	yes	yes	2 years
FPWR	FPWR-06A-0035	Stretching water hose DN20 L=350-700 A 2 rotatable nuts	0,35-0,7	yes	yes	2 years
FPWR	FPWR-06A-0050	Stretching water hose DN20 L=500-1000 A 2 rotatable nuts	0,5-1	yes	yes	2 years
FPWR	FPWR-07A-0010	Stretching water hose DN25 L=100-200 A 2 rotatable nuts	0,1-0,2	yes	yes	2 years
FPWR	FPWR-07A-0015	Stretching water hose DN25 L=150-300 A 2 rotatable nuts	0,15-0,3	yes	yes	2 years
FPWR	FPWR-07A-0025	Stretching water hose DN25 L=250-500 A 2 rotatable nuts	0,25-0,5	yes	yes	2 years
FPWR	FPWR-07A-0035	Stretching water hose DN25 L=350-700 A 2 rotatable nuts	0,35-0,7	yes	yes	2 years
FPWR	FPWR-08A-0050	Stretching water hose DN25 L=500-1000 A 2 rotatable nuts	0,5-1	yes	yes	2 years

FPWR-AN




Stretching water hose
Rotatable nut G1/2", G3/4", G1".
Hexagonal connector R1/2", R3/4", R1".
MOP: 0,5 bar.

STRETCHING WATER HOSE	ORDER NUMBER	PRODUCT NAME	LENGTH	APPROVED	HYGIENIC ATTEST	GUARANTEE
	code		m			
FPWR	FPWR-08AN-0010	Stretching water hose DN12 L=100-200 AN with connector	0,1-0,2	yes	yes	2 years
FPWR	FPWR-08AN-0015	Stretching water hose DN12 L=150-300 AN with connector	0,15-0,3	yes	yes	2 years
FPWR	FPWR-08AN-0025	Stretching water hose DN12 L=250-500 AN with connector	0,25-0,5	yes	yes	2 years
FPWR	FPWR-08AN-0035	Stretching water hose DN12 L=350-700 AN with connector	0,35-0,7	yes	yes	2 years
FPWR	FPWR-08AN-0050	Stretching water hose DN12 L=500-1000 AN with connector	0,5-1	yes	yes	2 years
FPWR	FPWR-06AN-0010	Stretching water hose DN20 L=100-200 AN with connector	0,1-0,2	yes	yes	2 years
FPWR	FPWR-06AN-0015	Stretching water hose DN20 L=150-300 AN with connector	0,15-0,3	yes	yes	2 years
FPWR	FPWR-06AN-0025	Stretching water hose DN20 L=250-500 AN with connector	0,25-0,5	yes	yes	2 years
FPWR	FPWR-06AN-0035	Stretching water hose DN20 L=350-700 AN with connector	0,35-0,7	yes	yes	2 years
FPWR	FPWR-06AN-0050	Stretching water hose DN20 L=500-1000 AN with connector	0,5-1	yes	yes	2 years
FPWR	FPWR-07AN-0010	Stretching water hose DN25 L=100-200 AN with connector	0,1-0,2	yes	yes	2 years
FPWR	FPWR-07AN-0015	Stretching water hose DN25 L=150-300 AN with connector	0,15-0,3	yes	yes	2 years
FPWR	FPWR-07AN-0025	Stretching water hose DN25 L=250-500 AN with connector	0,25-0,5	yes	yes	2 years
FPWR	FPWR-07AN-0035	Stretching water hose DN25 L=350-700 AN with connector	0,35-0,7	yes	yes	2 years
FPWR	FPWR-07AN-0050	Stretching water hose DN25 L=500-1000 AN with connector	0,5-1	yes	yes	2 years

FPWBR 30 mm

Stretching hoses for installation of water batteries



Stretching hose for water battery
Short end-part (30 mm).
Rotatable nut G1/2", G3/8".
MOP: 10 bar.

- for wash- basin, bath, sink batteries
- possibility of hose stretch to double of original size
- available end-parts for different types of batteries with end-part of pipe 30 or 70 mm
- two types of nuts: 3/8" or 1/2"
- hoses from good quality steel, corroding process-proof
- the product was tested for impermeability

STRETCHING HOSE	ORDER NUMBER	PRODUCT NAME	LENGTH	APPROVED	HYGIENIC ATTEST	GUARANTEE
	code		m			
FPWBR	FPWBR-1/2-M10/30-300	Stretching hose for battery DN8 1/2 M10/30 L=300/600	0,3 – 0,6	yes	HK/W/0394/01/2012	15 years
FPWBR	FPWBR-3/8-M10/30-300	Stretching hose for battery DN8 3/8 M10/30 L=300/600	0,3 – 0,6	yes	HK/W/0394/01/2012	15 years

FPWBR 70 mm



Stretching hose for water battery
Long end-part (70 mm).
Rotatable nut G1/2", G3/8".
MOP: 10 bar.

- for wash- basin, bath, sink batteries
- possibility of hose stretch to double of original size
- available end-parts for different types of batteries with end-part of pipe 30 or 70 mm
- two types of nuts: 3/8" or 1/2"
- hoses from good quality steel, corroding process-proof
- the product was tested for impermeability

STRETCHING HOSE	ORDER NUMBER	PRODUCT NAME	LENGTH	APPROVED	HYGIENIC ATTEST	GUARANTEE
	code		m			
FPWBR	FPWBR-1/2-M10/70-300	Stretching hose for battery DN8 1/2 M10/70 L=300/600	0,3 – 0,6	yes	HK/W/0394/01/2012	15 years
FPWBR	FPWBR-3/8-M10/70-300	Stretching hose for battery DN8 3/8 M10/70 L=300/600	0,3 – 0,6	yes	HK/W/0394/01/2012	15 years

FPW-DN

Elastic metal hoses for water and gas



Elastic crinkle ring hose

Elastic crinkle hose

- simplification of installation in difficult accessible places
- compensation of oscillation and of unintentional shifts
- arbitrary hand formation of hose
- ring hose
- possibility of making the hose with requested end-part – on order
- hygienic attest – the product is intended for drinking water

METAL HOSE	ORDER NUMBER	PRODUCT NAME	LENGTH	APPROVED	HYGIENIC ATTEST	GUARANTEE
	code		m			
FPW	FPW-DN20-0100	Crinkle hose DN20 L=100mb	100	yes	yes	2 years
FPW	FPW-DN20-0030	Crinkle hose DN20 L=30mb	30	yes	yes	2 years
FPW	FPW-DN20-0010	Crinkle hose DN20 L=10mb	10	yes	yes	2 years
FPW	FPW-DN16-0100	Crinkle hose DN16 L=100mb	100	yes	yes	2 years
FPW	FPW-DN16-0030	Crinkle hose DN16 L=30mb	30	yes	yes	2 years
FPW	FPW-DN16-0010	Crinkle hose DN16 L=10mb	10	yes	yes	2 years
FPW	FPW-DN12-0100	Crinkle hose DN12 L=100mb	100	yes	yes	2 years
FPW	FPW-DN12-0030	Crinkle hose DN12 L=30mb	30	yes	yes	2 years
FPW	FPW-DN12-0010	Crinkle hose DN12 L=10mb	10	yes	yes	2 years

6-00004 Regulation valve for hose DN 12, DN 16, DN 20



Nuts, sealing and rings




Installation set



Inter-collector connector



INSTALLATION PARTS	ORDER NUMBER	PRODUCT NAME	GUARANTEE
	code		
Installation parts	6-00004	Regulation valve for hoses with diameter DN 12, DN 16, DN 20	2 years
Installation parts	6-20016	Set DN 16 – 10 pieces of nuts of half rings, silicone sealing	2 years
Inter-collector connector	6GZP-ZP020-0080-01	Inter-collector connector DN 20, L=80mm	10 years

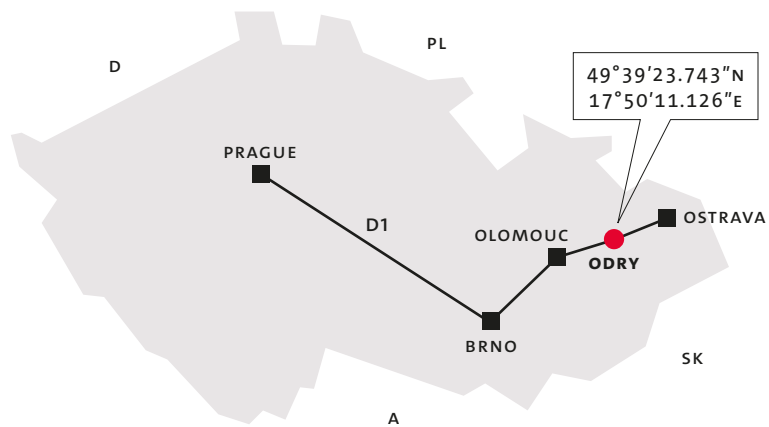

MATEICIUC a.s., Ke Koupališti 370/15, 742 35 Odry, Czech republic
tel.: +420/556 312 411, tel/fax: +420/556 730 417
e-mail: marketing@mateiciuc.cz, website: www.mat-plasty.com